


## SIRENCO HE36 HOOTER

This electric horn is suitable for applications where a low frequency sound is required. This hooter is often used as an extension bell for telephone systems and can be connected to a telephone line and will trigger the horn with 220 Vac when a ring is detected on the telephone line.

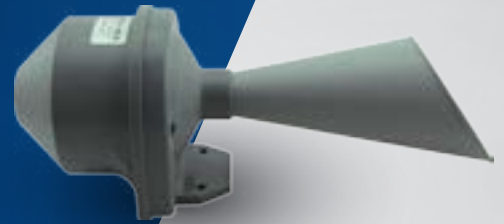

SH10012	12VAC	SH10024	24VAC
SH10110	110VAC	SH10220	220VAC


### OPTIONAL EXTRAS

TELKOM RELAY



## SPECIFICATIONS

VOLTAGE	12VAC   24VAC   110VAC   220VAC
DUTY CYCLE	Continuously Rated
SOUND OUTPUT	105dB(A) at 1 m
SOUND FREQUENCY	550Hz
APP. RANGE	500m in still air on open field
MOTOR	Moving coil diaphragm
CURRENT CONSUMPTION*	12VAC - 5.3A   24VAC - 27.A   110VAC - 0.5A   220VAC - 0.3A
IP RATING	IP 44
WEIGHT	1.1kg
PACKING DIMENSIONS	375x150x150mm

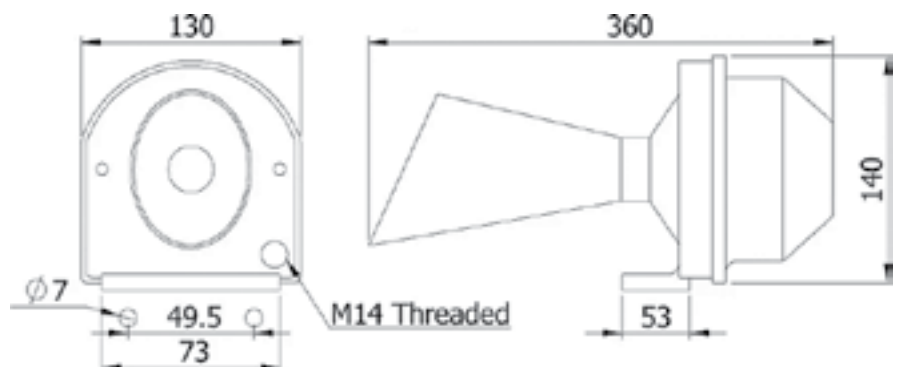

**IP44**



All dimensions in mm